
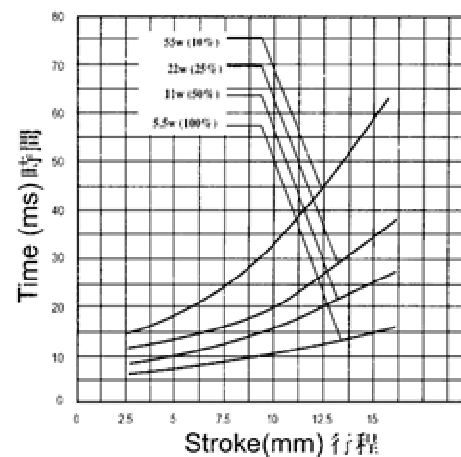
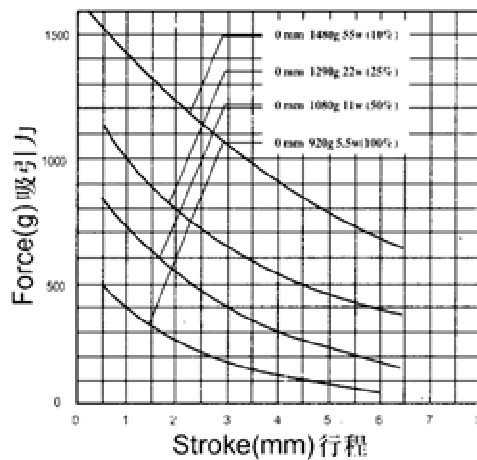


ST-1632

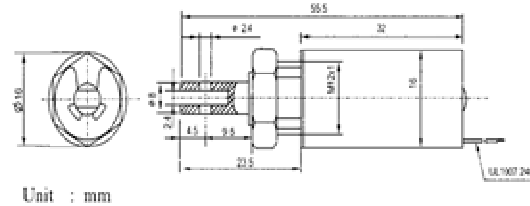

Duty cycle(%) $\frac{\text{“ON”time}}{\text{“ON”time}+\text{“OFF”time}} \times 100\%$			100%	50%	25%	10%
			Continuous	INTERMITTENT		
MAX. “ON” time in seconds			∞	230	25	6
Watts at 20°C			5.5	11	22	55
Ampere-Turns at 20°C			738	1058	1476	2338
Type no.	Resistance Ω (20°C)	Coil Turns	Coil Voltage			
ST-1414-3V	5.14	632	6	8.5	12	19
ST-1414-6V	20.7	1273	12	17	24	38
ST-1414-12V	83.5	2567	24	34	48	76
ST-1414-24V	325	4996	48	68	96	152