


## ● Features

- High reliability
- Arc-Free with no snubbing circuits
- 3750Vrms / 5000Vrms Input / Output isolation
- Tape & Reel version available
- Low driver power requirements (TTL/CMOS Compatible)
- SMD package 4 Pin type in miniature design  
(6.4 x 4.7 x 3.4 mm)



## ● Description

- The PMA637 is a 1-Form A solid state relay in a 4 pin SMD package that employs optically coupled MOSFET technology to provide 3750V / 5000V of input to output isolation. The optically coupled input is controlled by a highly efficient GaAlAs infrared LED and MOS FETs on the output side.

## ● Application

- Telecommunications (PC, Electronic notepad) / Measuring and Testing Equipment / Industrial Control / Security Equipments / High Speed Inspection Machine, etc.

## ● Absolute Maximum Ratings (Ambient Temperature: 25°C)

Item		Symbol	Value	Units	Note
Input	Continuous LED Current	$I_F$	50	mA	
	Peak LED Current	$I_{FP}$	1000	mA	f=100Hz, duty=1%
	LED Reverse Voltage	$V_R$	5	V	
	Input Power Dissipation	$P_{In}$	75	mW	

# Photo DMOS - FET Relay | PMA637



RELAY / ISO9001 / IATF16949 CERTIFIED

## ● Absolute Maximum Ratings (Ambient Temperature: 25°C)

Item		Symbol	Value	Units	Note
Output	Load Voltage	$V_L$	60	V (AC peak or DC)	
	Load Current	$I_L$	3.0	A	
	Peak Load Current	$I_{Peak}$	5.0	A	100ms (1 pulse)
	Output Power Dissipation	$P_{out}$	400	mW	
Total Power Dissipation		$P_T$	500	mW	
I/O Breakdown Voltage		$V_{I/O}$	3750	Vrms	RH=60%, 1min
I/O Breakdown Voltage (Suffix-V)		$V_{I/O}$	5000	Vrms	RH=60%, 1min
Operating Temperature		$T_{Opr}$	-40 to +85	°C	
Storage Temperature		$T_{Stg}$	-40 to +100	°C	
Pin Soldering Temperature		$T_{Sol}$	260	°C	10 sec max.

## ● Electrical Specifications (Ambient Temperature: 25°C)

Item		Symbol	MIN.	TYP.	MAX.	Units	Note
Input	LED Forward Voltage	$V_F$		1.2	1.5	V	$I_F=10mA$
	Operation LED Current	$I_{F On}$		0.5	5.0	mA	
	Recovery LED Current	$I_{F Off}$	0.1	0.35		mA	
	Recovery LED Voltage	$V_{F Off}$	0.7			V	
Output	On-Resistance	$R_{On}$		0.06	0.1	$\Omega$	$I_F=10mA$ , $I_L=100mA$ , Time to flow is within 1 sec.
	Off-State Leakage Current	$I_{Leak}$			1	$\mu A$	$V_L=Rating$
	Output Capacitance	$C_{Out}$		150		pF	$V_L=0$ , $f=1MHz$
Transmission	Turn-On Time	$T_{On}$		1.5	3.0	ms	$I_F=10mA$ ,
	Turn-Off Time	$T_{Off}$		0.1	0.3	ms	$I_L=100mA$ ,
Coupled	I/O Isolation Resistance	$R_{I/O}$	$10^{10}$			$\Omega$	DC500V
	I/O Capacitance	$C_{I/O}$		0.8	1.5	pF	$f=1MHz$


# Photo DMOS - FET Relay I PMA637




RELAY / ISO9001 / IATF16949 CERTIFIED

## ● Dimensions (UNIT: mm)

Outline Dimensions

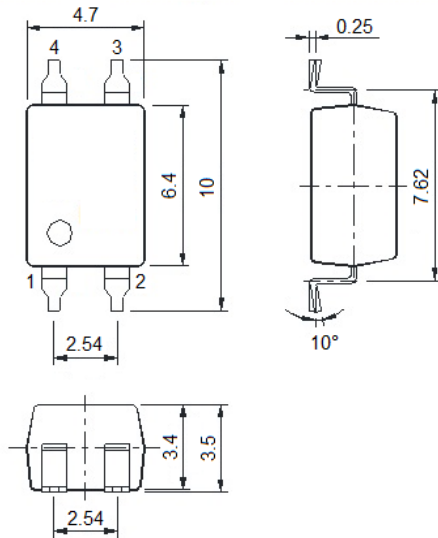


Recommended Mounting Pad Wiring Diagram

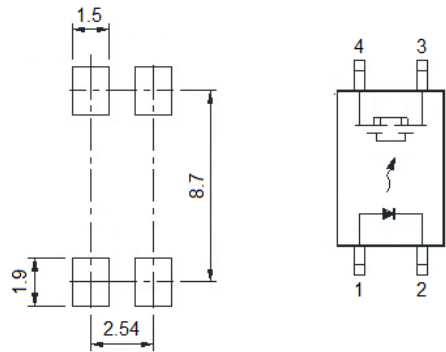

1. LED Anode
2. LED Cathode
3. Drain (MOS FET)
4. Drain (MOS FET)













## ● Tape Packing

Direction of Relay Insertion

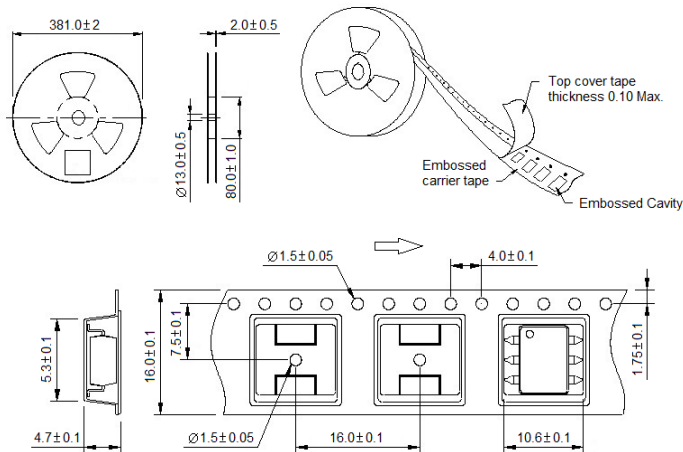

1,000pcs per reel

## Engineering Data



# Photo DMOS - FET Relay I PMA637



RELAY / ISO9001 / IATF16949 CERTIFIED

- Note:
1. There shall be leader of 230 mm minimum which may consist of carrier and or cover tape follower by a minimum of 160 mm of carrier tape sealed with cover tape.
  2. There shall be a minimum of 160 mm of empty component pockets sealed with cover tape.
  3. Devices are pockets in accordance with EIA standard EIA-481-A and specifications given above.

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $>1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $>5\text{mm}$ , tolerance should be  $\pm 0.5\text{mm}$ .

2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .

## Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact IOEC for the technical service. However, it is the user's responsibility to determine which product should be used only.

In & Out Electronic Corporation. All rights of IOEC are reserved.