### I 🕑 E C

#### Photo DMOS - FET Relay I PMA830

RELAY / ISO9001 / IATF16949 CERTIFIED

- Features
  - No moving parts
  - High reliability
  - Arc-Free with no snubbing circuits
  - 3750Vrms Input / Output isolation
  - Low driver power requirements (TTL/CMOS Compatible)
  - DIP package 6 Pin type in miniature design (6.4 x 8.8 x 3.4 mm)



#### Description

- The PMA830 is a 1-Form A solid state relay in a 6 pin DIP package that employs optically coupled MOSFET technology to provide 3750V of input to output isolation. The optically coupled input is controlled by a highly efficient GaAlAs infrared LED and MOS FETs on the output side.
- Application
  - Telecommunications (PC, Electronic notepad) / Measuring and Testing
    Equipment / Industrial Control / Security Equipments / High Speed Inspection
    Machine with No Snubbing Circuits, etc.

#### • Absolute Maximum Ratings (Ambient Temperature: 25°C)

	Item		Value	Units	Note	
Input	Continuous LED Current	I <sub>F</sub>	50	mA		
	Peak LED Current	I <sub>FP</sub>	1000	mA	f=100Hz, duty=1%	
	LED Reverse Voltage	V <sub>R</sub>	5	V		
	Input Power Dissipation	P <sub>In</sub>	75	mW		
Output	Load Voltage	VL	700	V (AC peak or DC)		
	Load Current	ΙL	600	mA	А	AC
			700	mA	В	DC
			800	mA	С	DC

IN & OUT ELECTRONIC CORPORATION <u>www.inandout.com.tw</u> 202

## Photo DMOS - FET Relay I PMA830

#### Absolute Maximum Ratings (Ambient Temperature: 25°C)


Item		Symbol	Value	Units	Note		
Output	Peak Load Current	I <sub>Peak</sub>	1200	mA	100m s (1 pulse)		
	Output Power Dissipation	P <sub>out</sub>	600	mW			
Total Power Dissipation		Ρ <sub>T</sub>	650	mW			
I/O Breakdown Voltage		V <sub>I/O</sub>	3750	Vrms	RH=60%, 1min		
Operating Temperature		T <sub>Opr</sub>	-40 to +85	°C			
Storage Temperature		T <sub>Stg</sub>	-40 to +100 °C				
Pin Soldering Temperature		$T_{Sol}$	260	°C	10 sec max.		

#### Electrical Specifications (Ambient Temperature: 25°C)

Item		Symbol	MIN.	TYP.	MAX.	Units	Note
Input	LED Forward Voltage	$V_{F}$		1.2	1.5	V	I <sub>F</sub> =10mA
	Operation LED Current	I <sub>F On</sub>		0.8	5.0	mA	
	Recovery LED Current	I <sub>F Off</sub>	0.35	0.8		mA	
	Recovery LED Voltage	$V_{FOff}$	0.7			V	
Output	On-Resistance	R <sub>On</sub>		1.0	1.3	Ω	I <sub>F</sub> =10mA, I <sub>L</sub> =Rating, Time to flow is within 1 sec.
	Off-State Leakage Current	$I_{Leak}$			1.0	uA	V <sub>L</sub> =Rating
	Output Capacitance	C <sub>Out</sub>		1900		рF	V <sub>L</sub> =0, f=1MHz
Transmission	Turn-On Time	$T_{On}$		0.5	2.0	ms	I <sub>F</sub> =10mA,
	Turn-Off Time	T <sub>Off</sub>		0.03	0.2	ms	I <sub>∟</sub> =Rating,
Coupled	I/O Isolation Resistance	R <sub>I/O</sub>	10 <sup>10</sup>			Ω	DC500V
	I/O Capacitance	C <sub>I/O</sub>		0.8	1.5	pF	f=1MHz

#### Photo DMOS - FET Relay I PMA830

RELAY / ISO9001 / IATF16949 CERTIFIED



⊟3

0.25

0

========

6.4

3.9

cr.

8.8

6

 $\exists_1 \vDash_2$ 

6.9

2.54

5.08

5

# Recommended Wiring Mounting Pad Diagram

1


.62

Æ

Æ

5.08

2.54





2: Cathode (LED)


4: Drain (MOS FET)

5: Source (MOS FET)

6: Drain (MOS FET)



0.47

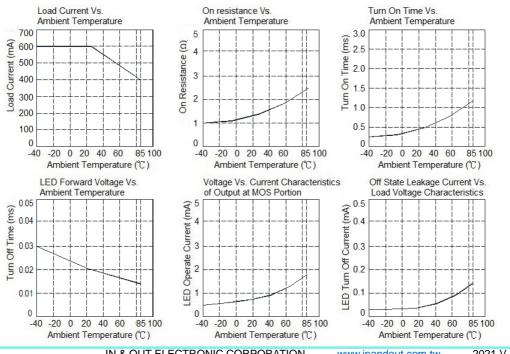

IN & OUT ELECTRONIC CORPORATION


www.inandout.com.tw

2021 V 1.0.0

#### Photo DMOS - FET Relay I PMA830

RELAY / ISO9001 / IATF16949 CERTIFIED

#### Engineering Data

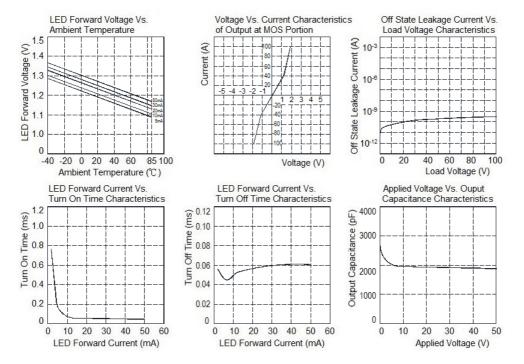

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension >1mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension >5mm, tolerance should be  $\pm 0.5$ mm.

2) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.

#### Disclaimer

The specification is for reference only. See to"Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact IOEC for the technical service. However, it is the user's responsibility to determine which product should be used only.

In & Out Electronic Corporation. All rights of IOEC are reserved.