



SK-1240

► PRACTICALITY




24*29*40


► **DIMENSIONS(UNIT:MM)**

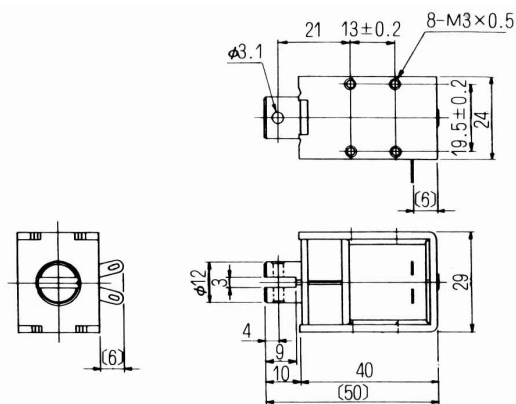

► STROKE AND FORCE

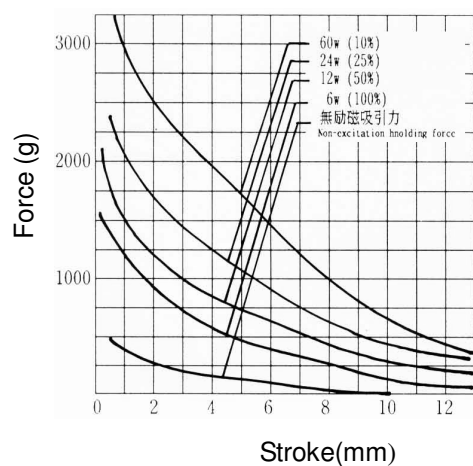

► POWER AND FORCE

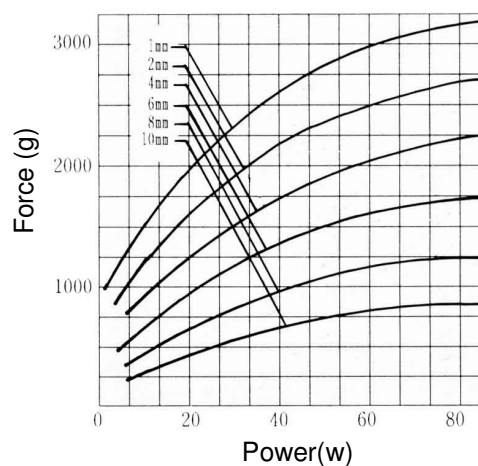

■ COIL DATA

Duty cycle(%) $\frac{\text{“ON”time}}{\text{“ON”time}+\text{“OFF”time}} \times 100\%$			100%	50%	25%	10%
			Continuous	INTERMITTENT		
MAX. “ON” time in seconds			∞	60	30	10
Watts at 20°C			6	12	24	60
Ampere-Turns at 20°C			683	967	1365	2160
Type no.	Resistance Ω (20°C)	Coil Turns	Coil Voltage			
SK-1240-6V	3	484	4.2	6	8.5	13.4
SK-1240-12V	12	976	8.5	12	17	26.8
SK-1240-24V	48	1952	17	24	33.9	53.7
SK-1240-48V	192	3904	33.9	48	67.8	107.3