




IOEC

In&Out Electronic Corp.


SK-1040

► PRACTICALITY

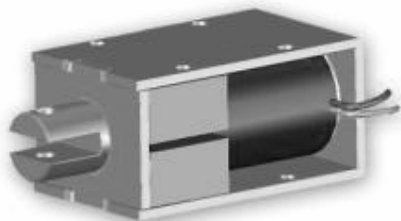


20*24*40


► DIMENSIONS(UNIT:MM)

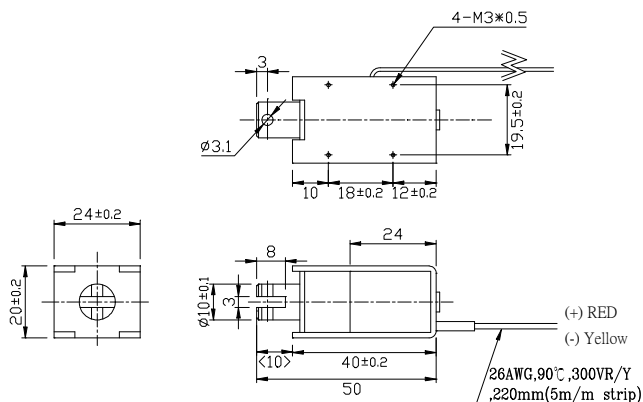

► STROKE AND FORCE

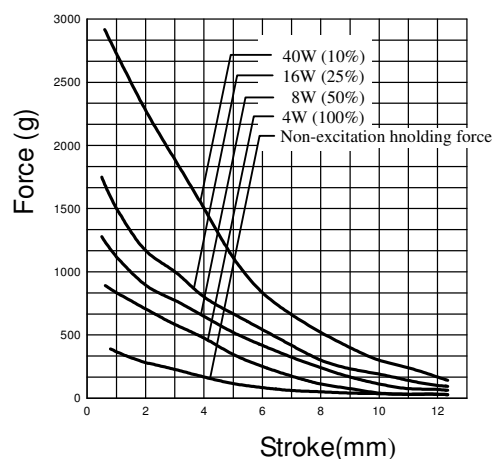

► POWER AND FORCE

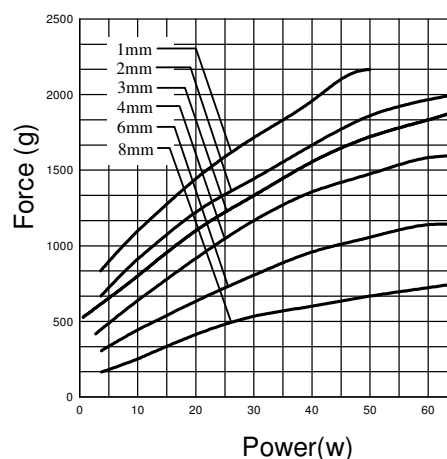

■ COIL DATA

Duty cycle(%) $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$			100%	50%	25%	10%
			Continuous	INTERMITTENT		
MAX. "ON" time in seconds			∞	160	90	30
Watts at 20°C			4	8	16	40
Ampere-Turns at 20°C			436	616	873	1376
Type no.	Resistance Ω (20°C)	Coil Turns	Coil Voltage			
SK-1040-6V	4.5	462	4.2	6	8.5	13.4
SK-1040-12V	18	924	8.5	12	17	26.8
SK-1040-24V	72	1848	17	24	34	53.7
SK-1040-48V	288	3696	34	48	67.9	107.3