

## ● Features

- 25A motor locked load
- Extremely small relay
- Change-over contact version
- 2 Form A & 2 Form C contact arrangement
- Plastic sealed and dust protected types available
- Environmental friendly product (RoHS compliant)
- Dimension: 14.0 x 15.4 x 13.5 mm



## ● Application

Central Door Lock / Power Doors and Windows / Indicator Lamp Control / Seat Adjustment / Sunroof Motor Control / Mirror Adjustment / Wiper Control, etc.

## ● Contact Data

Contact Arrangement	2A	2C
Contact Material	Ag Alloy	
Contact Rating	25A 16VDC	
Max. Switching Power	400W	
Max. Switching Voltage	16VDC	
Max. Switching Current	30A	
Min. Contact Load	1A 6VDC	
Voltage Drop (initial)	Typ. 50mV (at 10A) Typ. 250mV (at 10A)	
Contact Resistance	≤ 100mΩ	
Electrical Endurance	1x10 <sup>5</sup>	
Mechanical Endurance	1x10 <sup>7</sup>	

### ● Coil Parameter

Coil Voltage (VDC)		Coil Resistance ( $\Omega \pm 10\%$ )	Pickup Voltage(max) (VDC)	Release Voltage(min) (VDC)	Coil Power Consumption (W)
Rated	Max.				
12	13.2	225	7.20	1.20	0.64
12	13.2	180	6.50	1.20	0.80

### ● Operation Condition

Insulation resistance		100M $\Omega$ min (at 500VDC)
Dielectric Strength	Between Contacts	500V, 50/60Hz 1 min.
	Between Contact and Coil	500V, 50/60Hz 1 min.
Shock Resistance		98m/s <sup>2</sup>
Vibration Resistance		10~500Hz, 5.0G
Ambient Temperature		-40~105 $^{\circ}$ C (no freezing)
Operate Time		$\leq 10$ ms
Release Time		$\leq 10$ ms
Relative Humidity		85% (at 40 $^{\circ}$ C)
Weight		Approx. 8.0g



### ● Ordering Information

		A8S	-12D	80	-2C	-S	(XXX)
<b>Model</b>							
<b>Coil Voltage</b>	12: 12VDC						
<b>Coil Power</b>	Nil: 0.64W 80: 0.80W						
<b>Contact Arrangement</b>	2A: 2 Form A 2C: 2 Form C						
<b>Construction</b>	Nil: Flux tight S: Sealed						
<b>Special Code</b>	Nil: Standard XXX: Customer special requirement						




● Dimensions (UNIT: mm)

Outline Dimensions

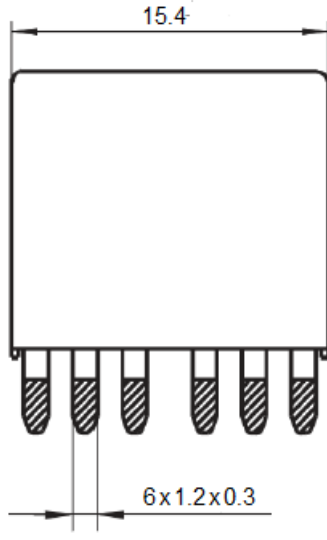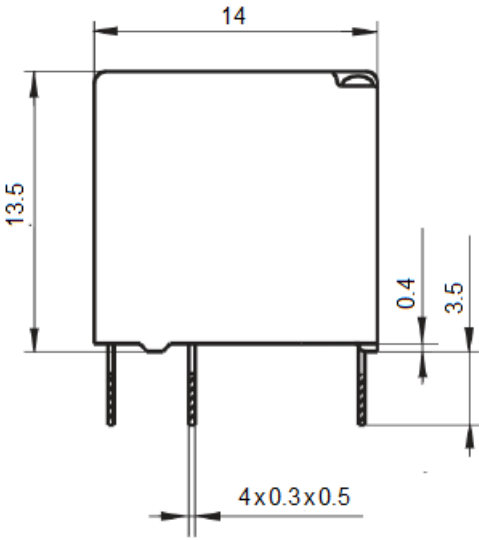


Mounting (Bottom views)

2 Form A

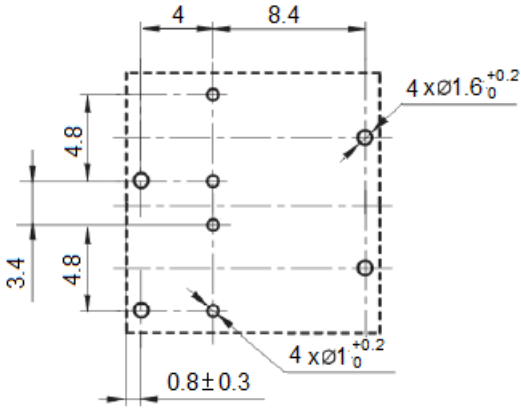


2 Form C

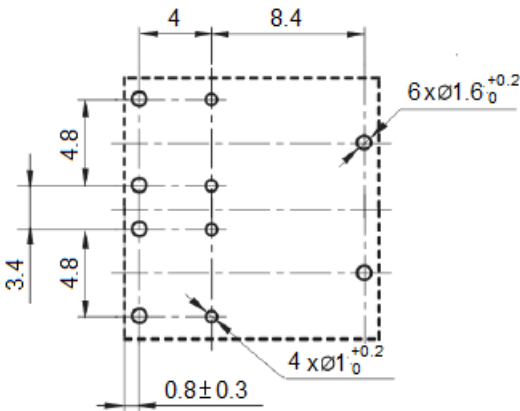


- Dimensions (UNIT: mm)  
Wiring Diagram (Bottom views)

2 Form A



2 Form C



Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $>1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $>5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .

2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .